



(11) **EP 2 236 712 A2**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
06.10.2010 Bulletin 2010/40

(51) Int Cl.:
E05C 1/12 (2006.01) **E05C 9/00** (2006.01)
E05B 63/14 (2006.01)

(21) Application number: **10250487.5**

(22) Date of filing: **16.03.2010**

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO SE SI SK SM TR
Designated Extension States:
AL BA ME RS

• **Applied Concepts Aircraft Solutions, Inc.**
Stuart, FL 34997 (US)

(72) Inventor: **de Mola, Manuel Loret**
Jupiter
Florida 44378 (US)

(30) Priority: **31.03.2009 US 384064**

(74) Representative: **Price, Nigel John King**
J.A. Kemp & Co.
14 South Square
Gray's Inn
London WC1R 5JJ (GB)

(71) Applicants:
• **The Young Engineers, Inc.**
Lake Forest, CA 9263 (US)

(54) **Latch system with two assembly parts**

(57) A bolt mechanism comprising a backing plate adapted to be mounted on a complementary surface of a flat panel, a bolt assembly housing attached to the backing plate, a sliding bolt assembly carried on the bolt assembly housing one end of which has means adapted to engage and latch to a striker, a spring on said housing for keeping the end of the bolt extending out of the bolt assembly housing, the backing plate having means adapted to enable attachment to and detachment from an actuator housing assembly having complementary means adapted to enable attachment and detachment.

An actuator housing assembly comprising an actuator housing having an opening therein, a movable actuator member received in the opening, the actuator member having a front surface and a rear surface and being digitally movable in said opening, and a hammer extending from the rear surface of said movable actuator member.

The actuator housing assembly has means adapted to enable the attachment to and detachment from a bolt mechanism assembly having complementary means adapted to enable attachment and detachment.

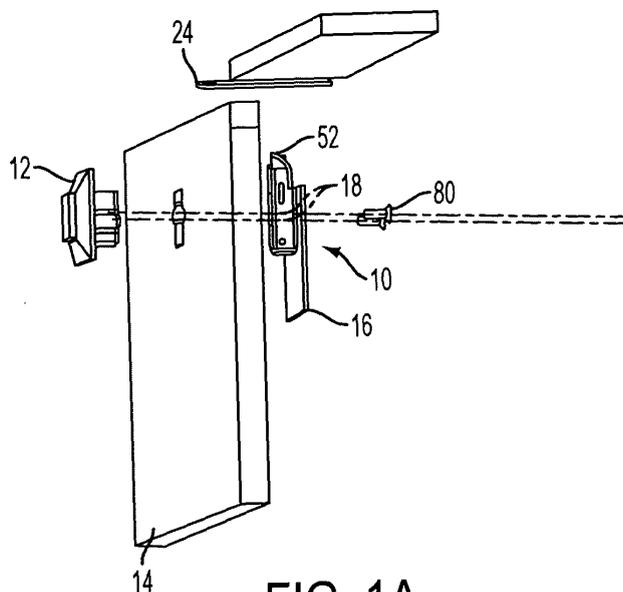


FIG. 1A

EP 2 236 712 A2